

FIG. 1

2/11

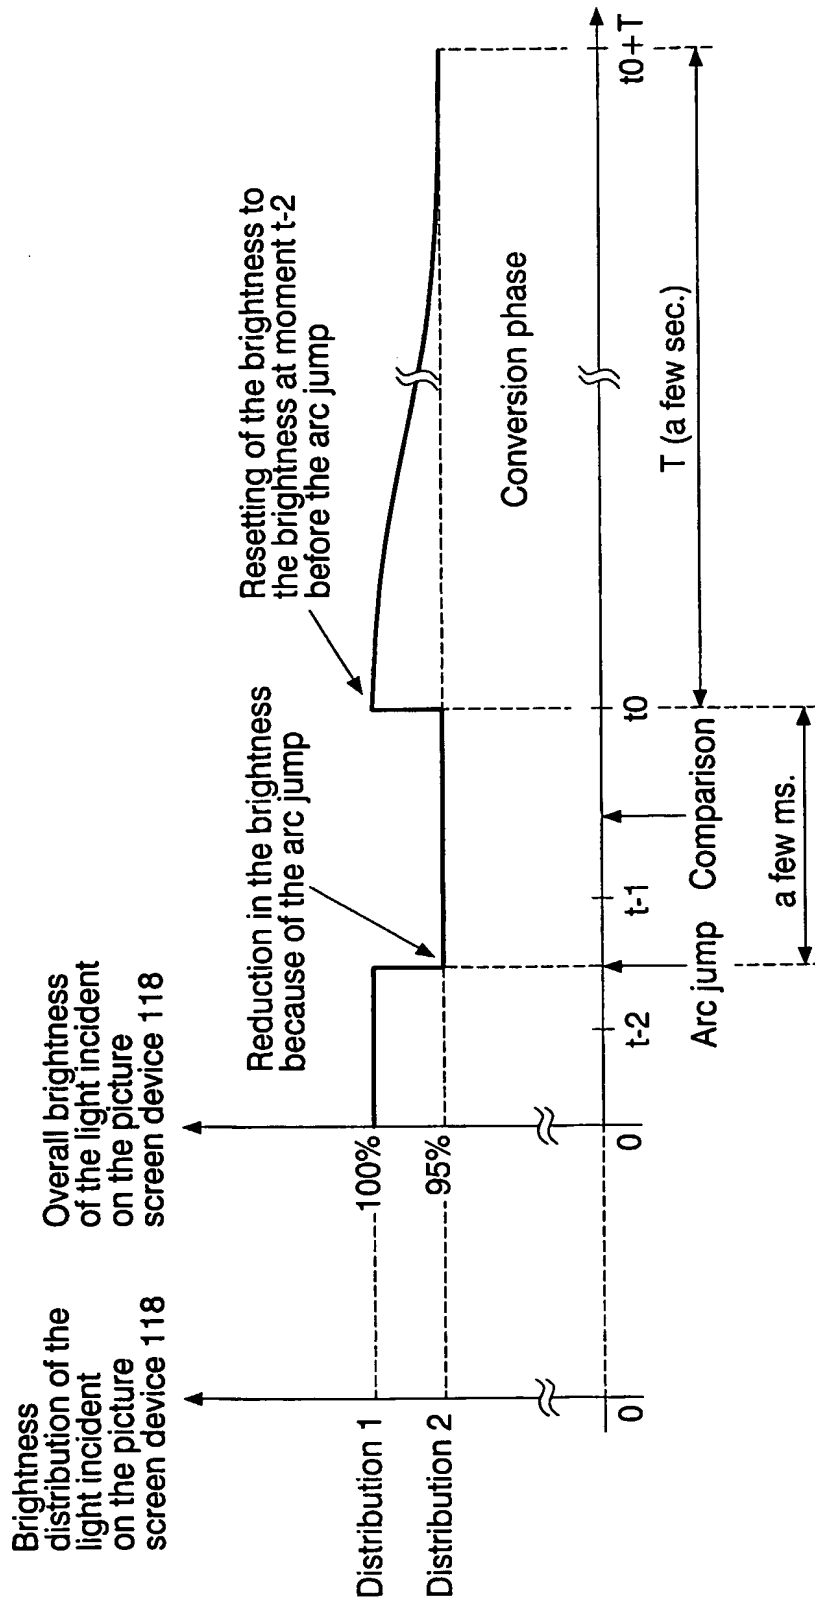


FIG. 2a

3/11

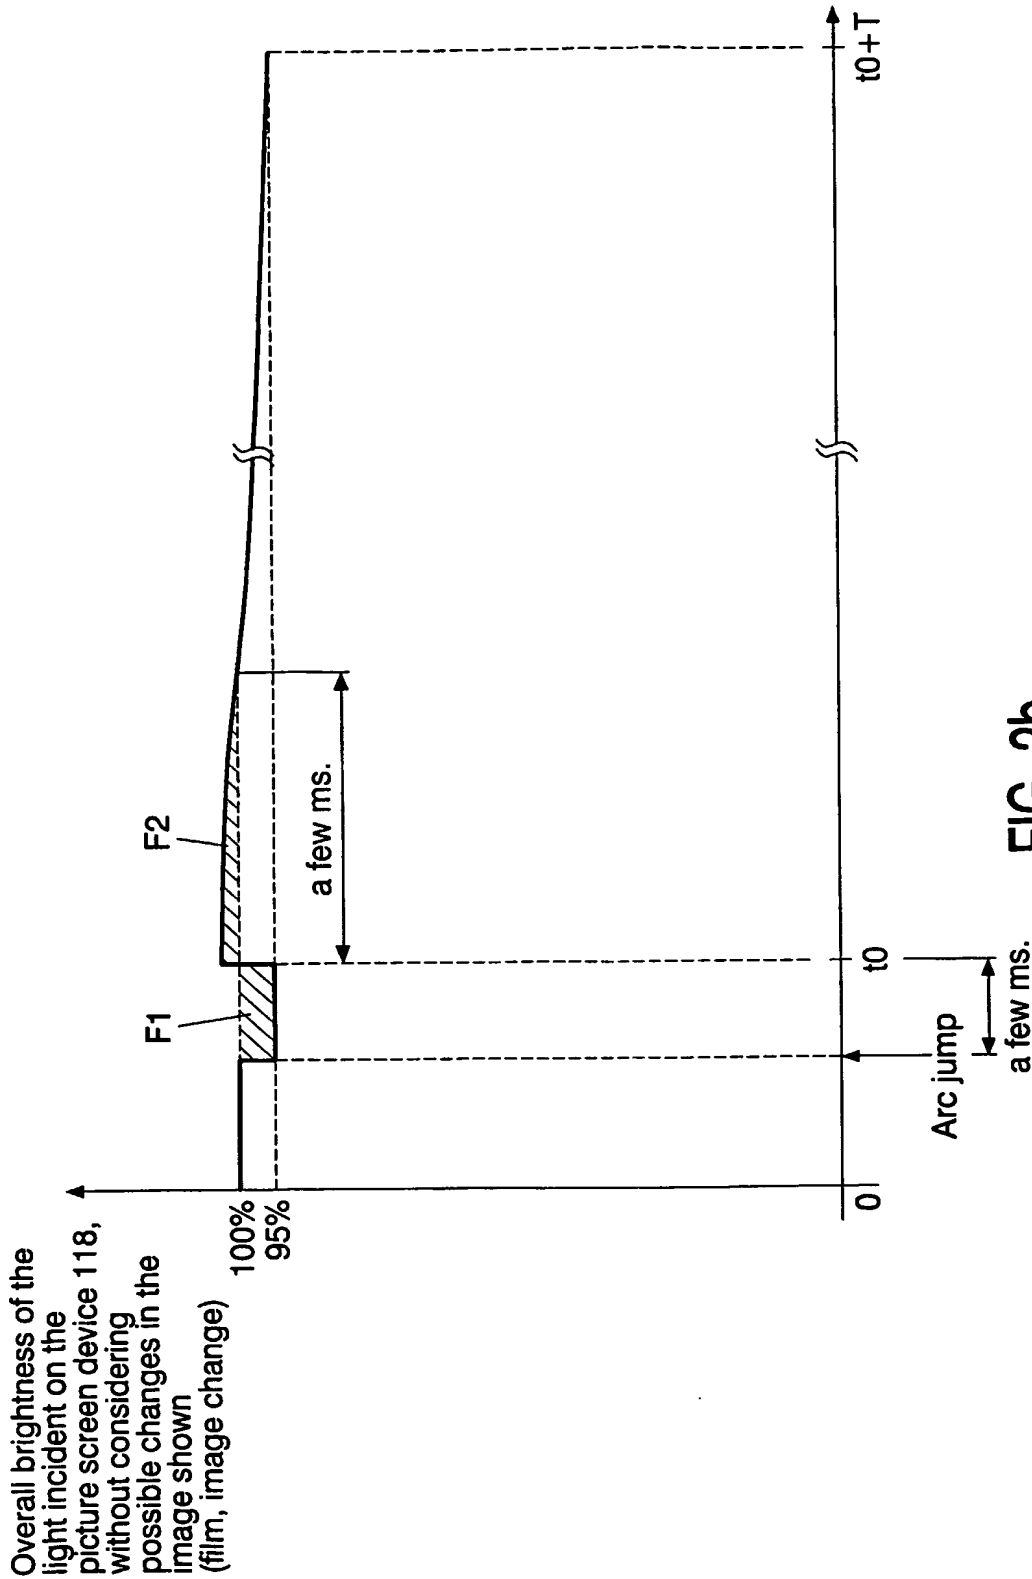


FIG. 2b

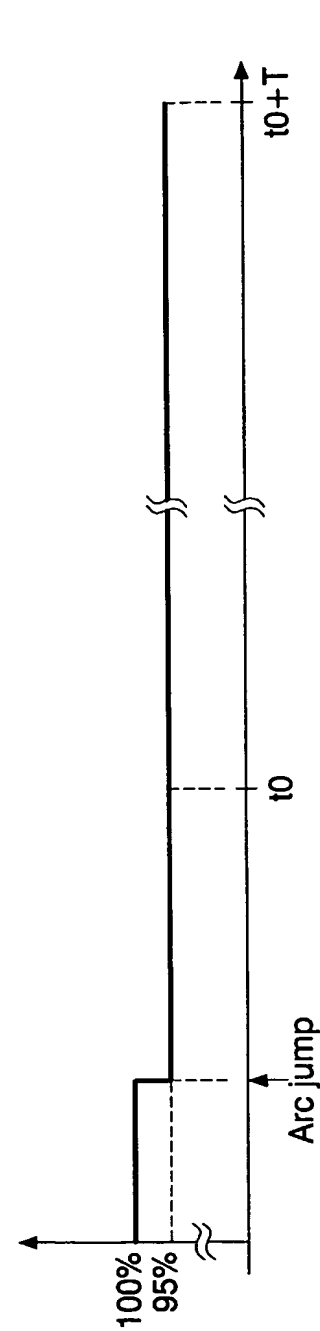


FIG. 2c i)

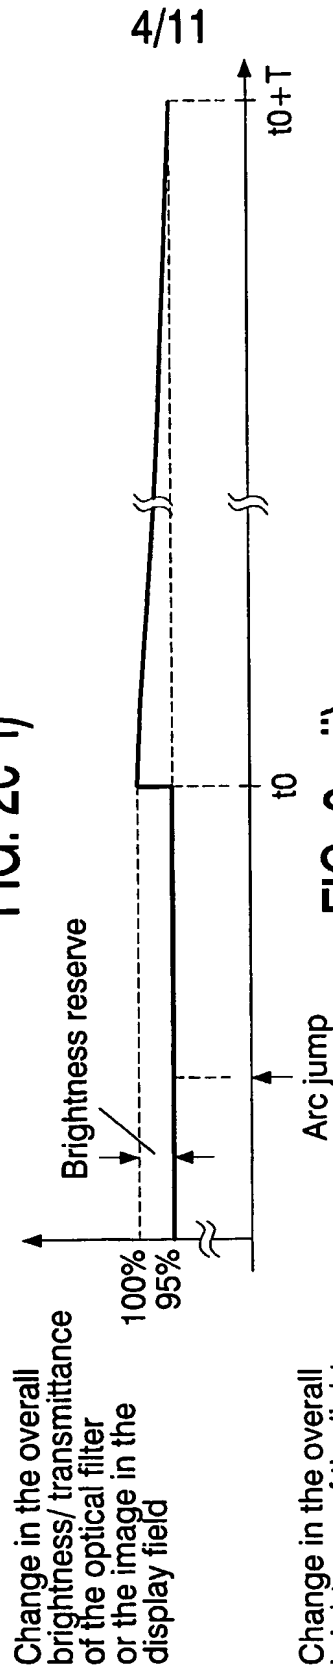


FIG. 2c ii)

Change in the overall brightness of the light incident on the picture screen device 118, without considering possible changes in the image shown (film, image change)


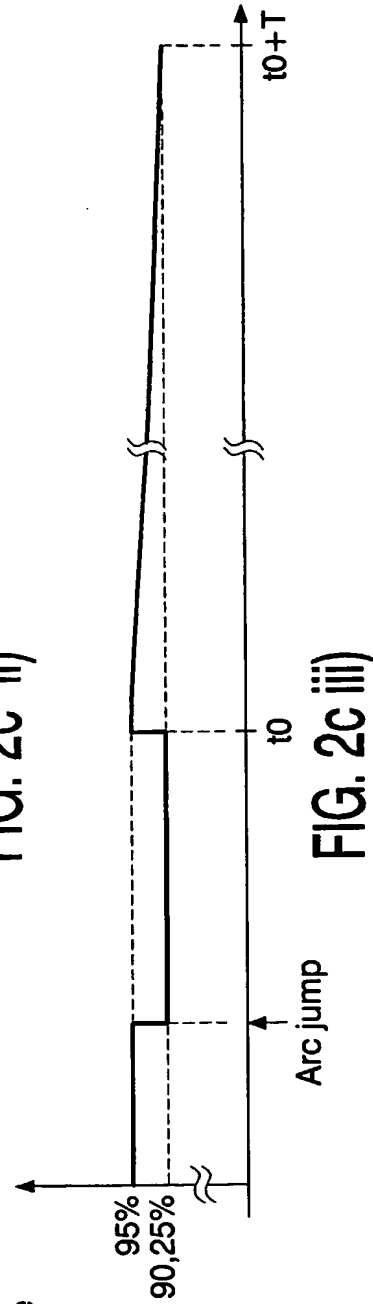



FIG. 2c iii)

5/11


Change in the overall
brightness of the light
emitted from the
HID lamp to the
display field

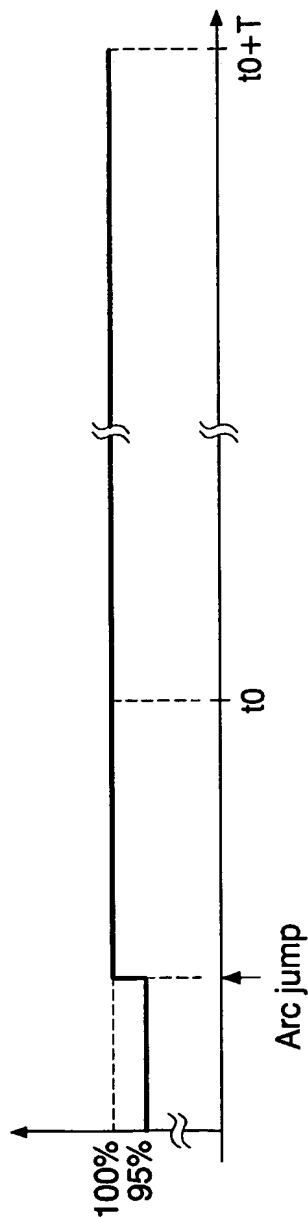

Change in the overall
brightness/transmittance
of the optical filter
or the image in the
display field

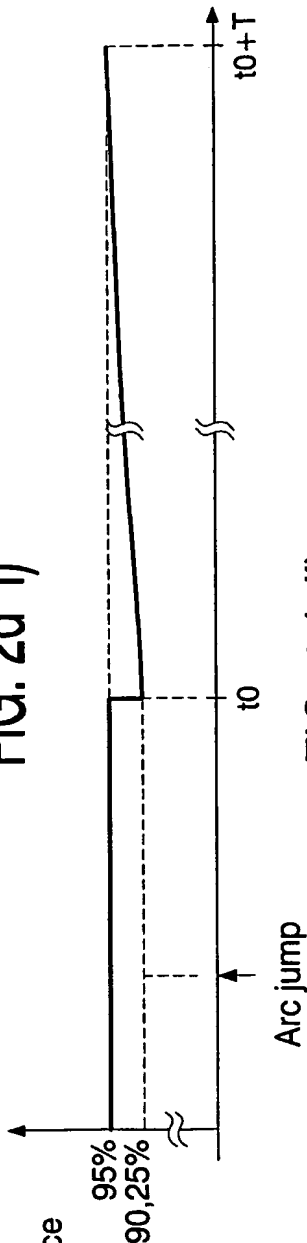

Change in the overall
brightness of the light
incident on the picture
screen device 118,
without considering
possible changes in
the image shown
(film, image change)

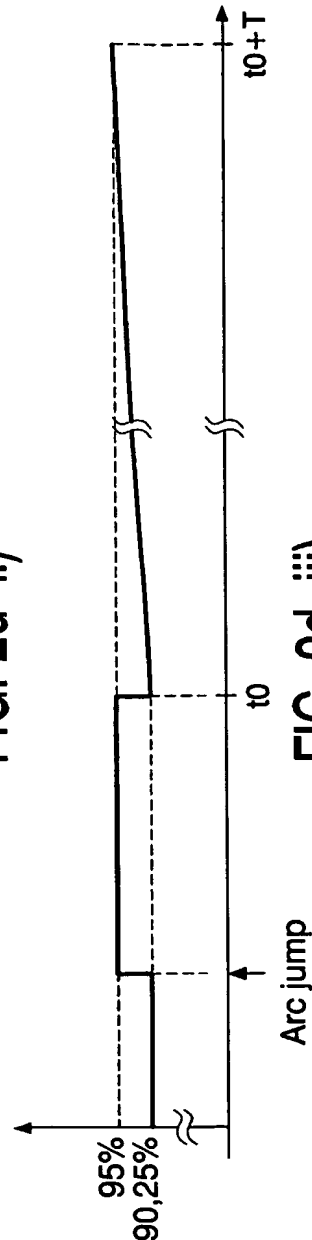

6/11

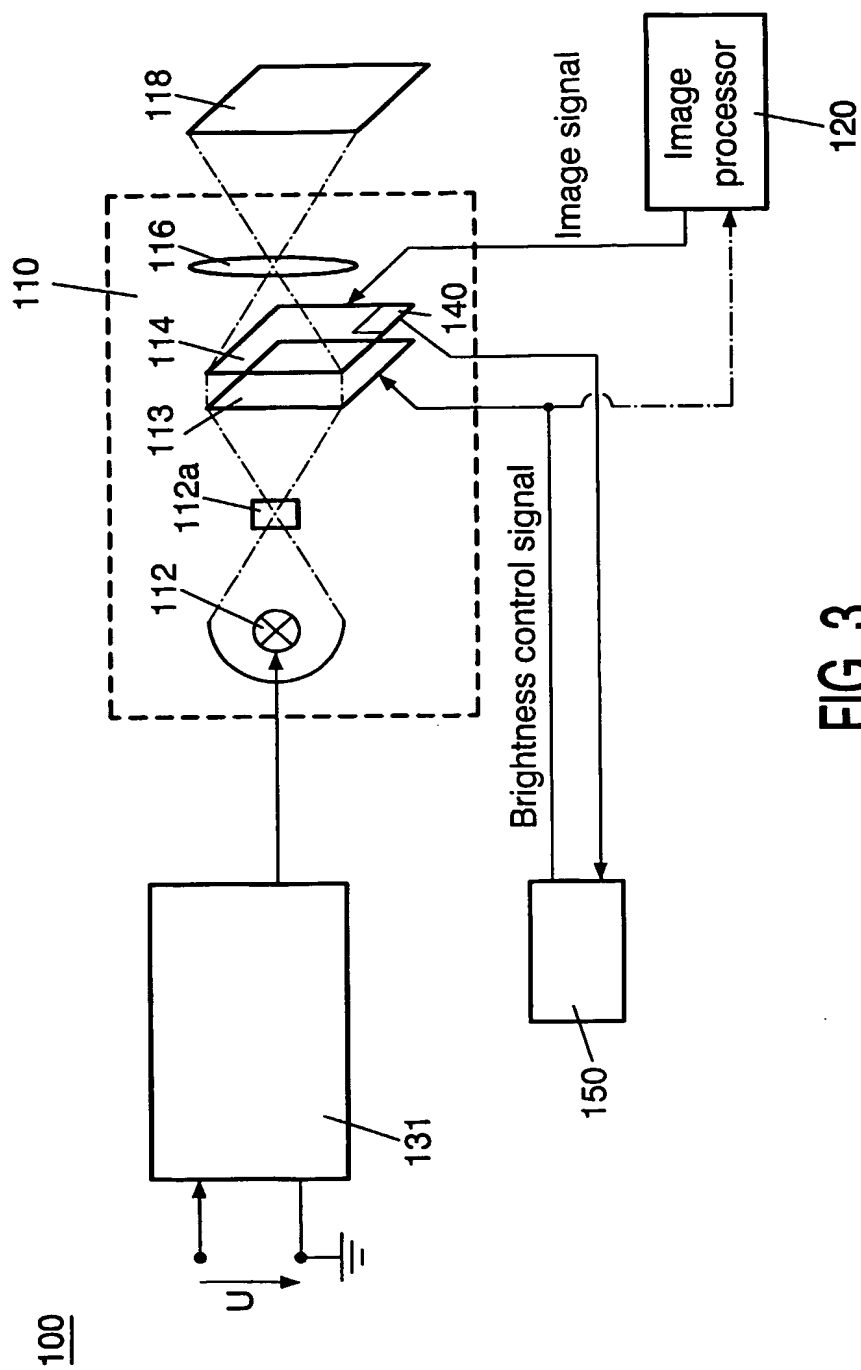


FIG. 3

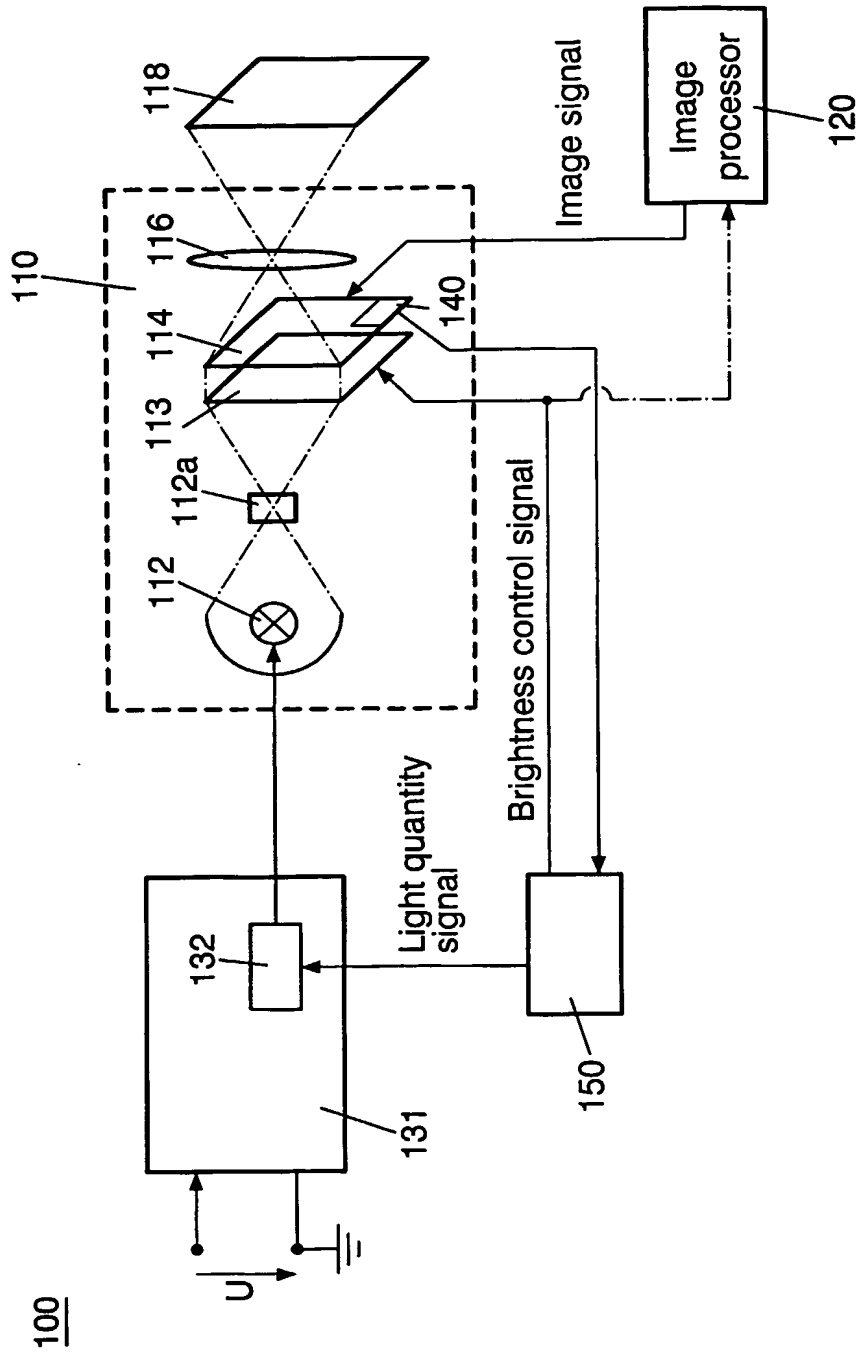


FIG. 4

8/11

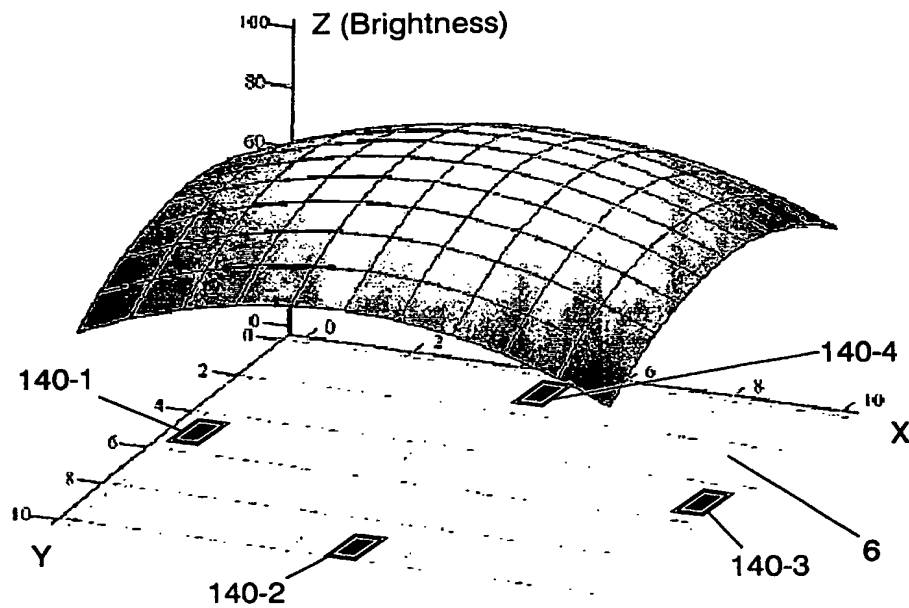


FIG.5a

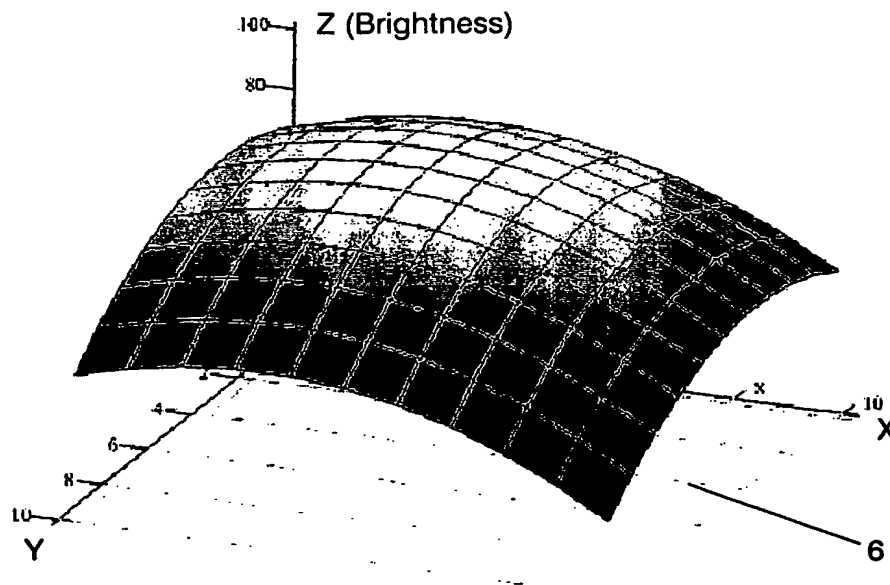


FIG.5b

BEST AVAILABLE COPY

9/11

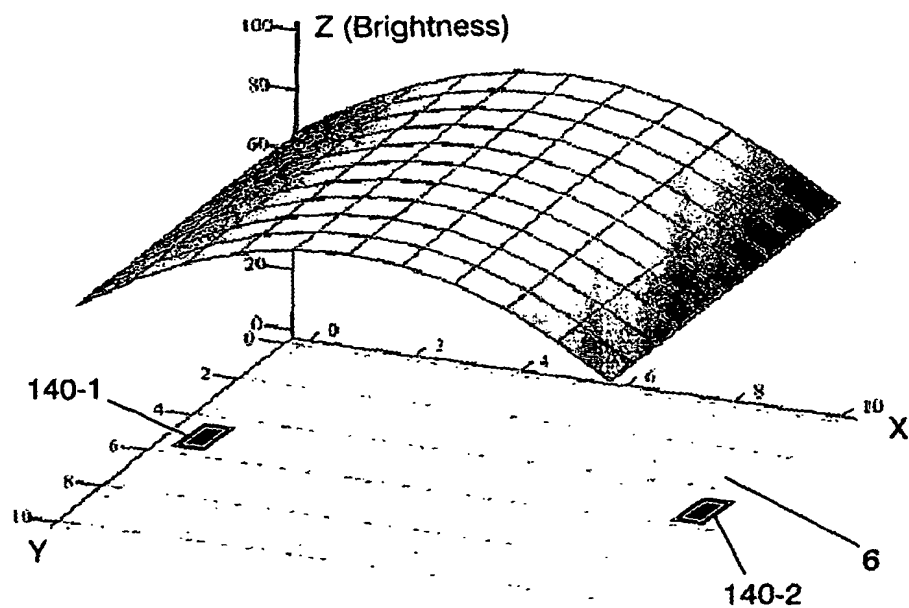


FIG.5c

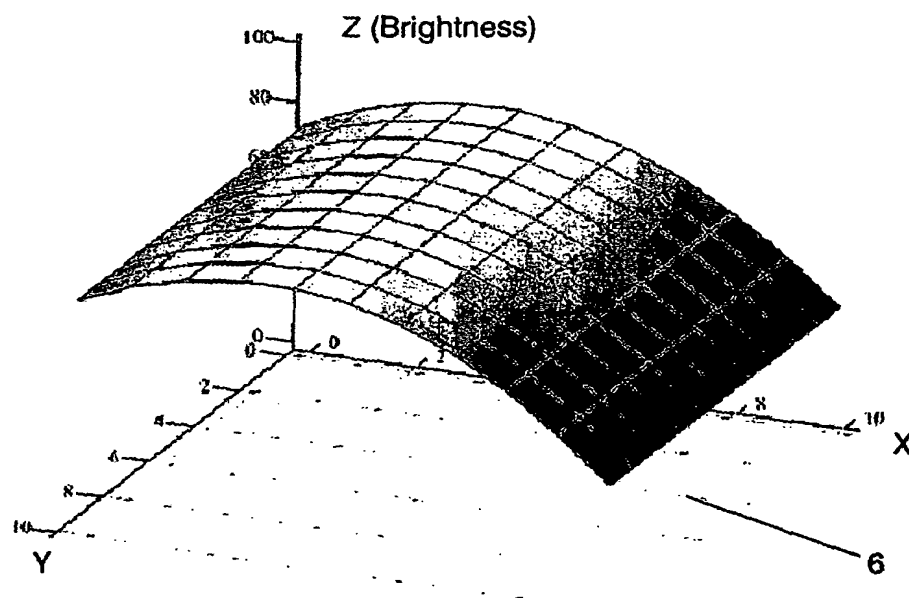


FIG.5d

10/11

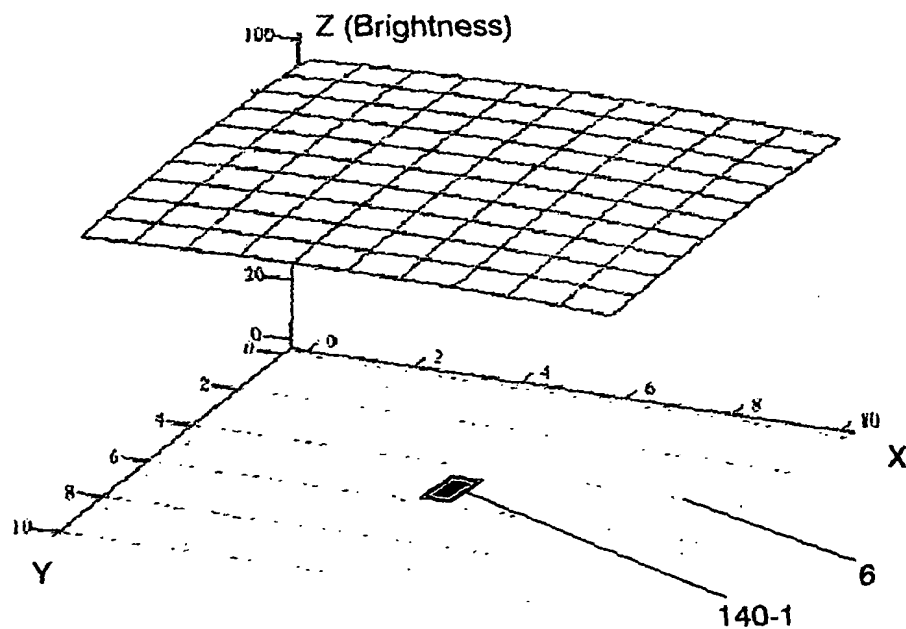


FIG.5e

BEST AVAILABLE COPY

11/11

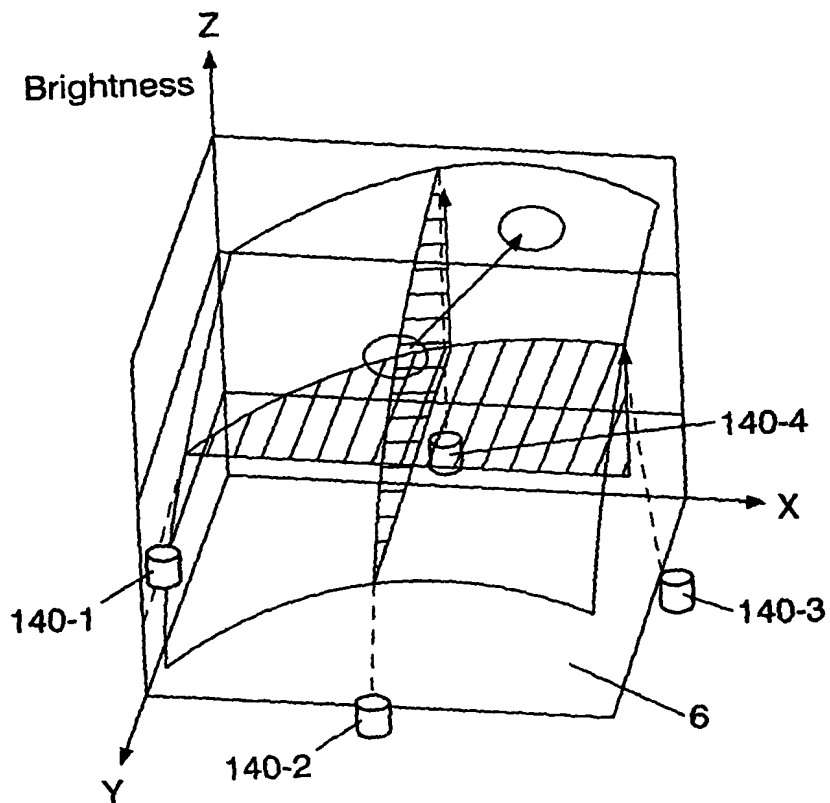


FIG. 6